

GB-2000 Firewall Appliance

Features

- VPN hardware acceleration
- four 10/100 Ethernet ports
- ICSA-certified GNAT Box System Software
- unrestricted concurrent users
- user authentication
- DHCP server
- DNS server
- secure email proxy (SMTP)
- SNMP
- PPP / PPPoE / PPTP
- local content list (LCL) filtering
- secure remote management
- stateful packet inspection
- time-based filters
- transparent NAT (network address translation)
- two DB-9 serial console interfaces
- two USB interfaces

Optional Features

- Mail Sentinel™ Anti-Virus email filtering
- Mail Sentinel™ Anti-Spam email filtering
- Surf Sentinel® web content filtering
- H₂A High Availability failover
- additional mobile VPN client licenses
- support contracts

Feature Specifications

- concurrent connections 128,000
- VPN mobile client licenses 1
- PPP configurations 5
- IP aliases 300
- IP pass-through hosts 300
- filters (each kind) 400
- tunnels 300
- address objects 600
- static NAT maps 300
- static routes 300
- time groups 100
- access control lists (ACL) 300
- local content list (LCL) filters 250
- protocols 255

Supported Software

- GTA Reporting Suite™ (firewall log reporting)
- GB-Commander® (firewall management)

Hardware Specifications

<i>Dimensions</i>	16.87" x 14.7" x 1.73" (428.6mm x 360mm x 44 mm)
<i>Weight</i>	11.45 lbs. (5.2 kg)

Power Specifications

<i>Input Voltage</i>	<i>Input Frequency</i>
100-240 VAC	47-63 Hz

Storage Specifications

<i>Temperature</i>	58 to 184° F (0° to 70° C)
<i>Relative Humidity</i>	5% to 95%, non-condensing



Operational Specifications

<i>Temperature</i>	41° to 104° F (5° to 40° C)
<i>Relative Humidity</i>	20% to 90%, non-condensing

Memory and CPU Specifications

<i>CPU</i>	2.0 GHz Intel Celeron
<i>Memory</i>	256 MB SDRAM
<i>Flash Memory</i>	512 MB Type 1 Compact Flash



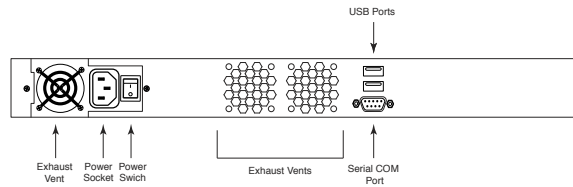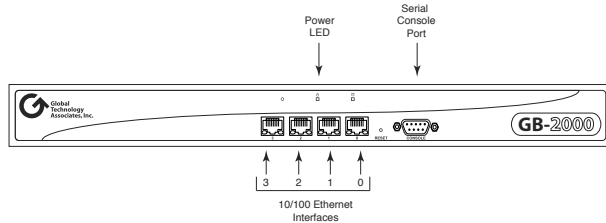

Hardware Specifications

<i>Dimensions</i>	16.87" x 14.7" x 1.73" (428.6mm x 360mm x 44 mm)
<i>Weight</i>	11.45 lbs. (5.2 kg)

Power Specifications

<i>Input Voltage</i>	<i>Input Frequency</i>
100-240 VAC	47-63 Hz

Storage Specifications

<i>Temperature</i>	58 to 184° F (0° to 70° C)
<i>Relative Humidity</i>	5% to 95%, non-condensing

Operational Specifications

<i>Temperature</i>	41° to 104° F (5° to 40° C)
<i>Relative Humidity</i>	20% to 90%, non-condensing

Memory and CPU Specifications

<i>CPU</i>	2.0 Ghz P4 Celeron
<i>Memory</i>	256 MB SDRAM
<i>Flash Memory</i>	512 MB Type 1 Compact Flash

Hardware Design

The GB-2000 chassis is a 1-RU unit designed to minimize heat buildup with two cooling fans. It has four high speed 10/100 Mbps Ethernet interfaces to ensure high performance and network design flexibility, one DB-9 serial interface to provide access for a serial

console, one DB-9 serial (COM) interface for a dial-up modem/ISDN TA, and two USB interfaces. Flash memory stores and runs the pre-installed GNAT Box System Software. Power is supplied by a power cable. A reboot may be triggered using the "Reset" pin hole.

Caution

At least 6" should be provided behind the system to allow efficient cooling. Inadequate clearance can cause the system to overheat.

Warning

There are no user serviceable parts in the GB-2000. Opening the unit will void the warranty on the system, and may cause injury.

I/O Interface Specifications

- Four (4) 10/100 Mbps Ethernet 10Base-T network interfaces on UTP Cat. 3, 4 and 5, and fast Ethernet 100Base-TX network interfaces on UTP Cat. 5. NIC 0 is factory set to IP address 192.168.71.254 .
- Two (s) DB-9 (RS-232) serial interfaces
The serial console / modem port should be set to 38,400 bps, 8 bit, 1 stop, no parity and flow control to hardware.
- Two (2) USB interfaces